

PREFLIGHT CHECK

CABIN

- 1 Aircraft Log & Aircraft Papers CHECKED
- 2 Control Lock..... REMOVED & STOWED AWAY
- 3 Ignition Switch..... OFF & KEY REMOVED
- 4 Avionics..... OFF
- 5 Master Switch ON
- 6 Fuel Quantity Indicators..... CHECKED (Endurance !)
- 7 Flaps FULL DOWN
- 8 Master Switch OFF

OUTSIDE

- 9 Outside Check ACCORDING AFM

PREFLIGHT CHECK COMPLETED

CHECK BEFORE ENGINE START

- 1 Cabin Doors & Windows..... CLOSED
- 2 Seats, Seat Belts & Shoulder Harness ADJUSTED & SECURED
- 3 Parking Brake SET
- 4 Fuel Shutoff Valve ON
- 5 Master Switch ON
- 6 Flaps UP
- 7 Mixture RICH
- 8 Throttle OPEN 1 cm
- 9 Carburettor Heat..... COLD
- 10 Beacon Light..... ON
- 11 Circuit Breakers CHECKED

CHECK BEFORE ENGINE START COMPLETED

STARTING ENGINE & AFTER ENGINE START CHECK

- 1 Primer (cold engine only !)..... 1 – 3 STROKES
- 2 Propeller Area & Zone behind Aircraft CLEAR
- 3 Ignition Switch..... START
- 4 Throttle 1 000 rpm
- 5 Oil Pressure (after max 30") **WITHIN GREEN ARC**
- 6 Ammeter..... CHECKED
- 7 Ventilation, Heater, Defroster AS REQUIRED
- 8 Avionics & Transponder ON & SET AS REQUIRED
- 9 FLARM..... ON
- 10 Engine Warm Up AS REQUIRED
- 11 Parking Brake RELEASED

STARTING & AFTER ENGINE START CHECK COMPLETED – READY TO TAXI

TAXI CHECK

- 1 Brakes & Steering CHECKED
- 2 Gyro Instruments & Magnetic Compass CHECKED

TAXI CHECK COMPLETED

RUN UP

- 1 Parking Brake SET
- 2 Oil Temperature & Oil Pressure **WITHIN GREEN ARC**
- 3 Zone behind Aircraft CLEAR
- 4 Throttle 1 700 rpm
- 5 Carburettor Heat CHECK OPERATION
- 6 Mixture CHECK OPERATION (EGT)
- 7 Magnetos (L – B – R – B) CHECKED
(MAX. 125 rpm / MAX DIFF. 50 rpm)
- 8 Suction **WITHIN GREEN ARC**
- 9 Ammeter CHECKED
- 10 Throttle IDLE (Min. 500 rpm – Max. 700 rpm)
- 11 Throttle 1 000 rpm

RUN UP COMPLETED

CHECK BEFORE DEPARTURE

- 1 Seats, Seat Belts & Shoulder Harness (PAX) RECHECKED
- 2 Cabin Doors & Windows CLOSED
- 3 Fuel Quantity L & R CHECKED (Endurance !)
- 4 Fuel Shutoff Valve ON
- 5 Flaps AS REQUIRED
- 6 Mixture RICH (below 3 000 ft AMSL)
- 7 Carburettor Heat COLD
- 8 Elevator Trim SET FOR TAKE OFF
- 9 Circuit Breakers CHECKED
- 10 Magnetos BOTH
- 11 Master Switch ON
- 12 Primer IN & LOCKED
- 13 Flight Instruments CHECKED & SET
- 14 Engine Instruments CHECKED
- 15 Flight Controls FREE & CORRECT
- 16 Departure & Emergency Briefing COMPLETED
- 17 Parking Brake RELEASED

CHECK BEFORE DEPARTURE COMPLETED – READY TO LINE UP

Approach Sector & Runway **FREE** / ENTER THE RUNWAY
 & LINE UP

LINE UP CHECK

- 1 Runway IDENTIFIED & DG SET
- 2 Wind CHECKED
- 3 Landing Light & Navigation Lights..... ON
- 4 Transponder "Mode ALT" DISPLAY "**GND**" (7 000)
- 5 Time NOTED

LINE UP CHECK COMPLETED

CLIMB CHECK

- 1 Power FULL POWER
- 2 Flaps UP (clear of obstacles,
 +ve ROC, SPEED > 60 kt)
- 3 Landing Light AS REQUIRED
- 4 Transponder "Mode ALT" DISPLAY "**ALT**" (7 000)

CLIMB CHECK COMPLETED

CRUISE CHECK

- 1 Altimeter SET AS REQUIRED
- 2 Directional Gyro RECHECKED
- 3 Cruise Power SET (according AFM)
- 4 Mixture LEANED
- 5 Fuel Quantity L or R..... CHECKED (Endurance !)
- 6 Engine Instruments..... **WITHIN GREEN ARC**

CRUISE CHECK COMPLETED

DESCENT CHECK

- 1 ATIS (if available) NOTED
- 2 Approach Briefing COMPLETED
- 3 Avionics..... SET
- 4 Directional Gyro RECHECKED
- 5 Mixture SET AS REQUIRED
- 6 Cabin & PAX..... SECURED

DESCENT CHECK COMPLETED

APPROACH CHECK

- 1 Altimeter SET QNH (D/W Altitude)
- 2 Landing Light ON
- 3 Carburettor Heat AS REQUIRED
- 4 Mixture RICH / AS REQUIRED
- 5 Fuel Quantity L & R CHECKED (Endurance !)
- 6 Fuel Shutoff Valve ON

APPROACH CHECK COMPLETED

FINAL CHECK

- 1 Carburettor Heat *push*..... COLD
- 2 Mixture *push*..... RICH / AS REQUIRED
- 3 Flaps *down*..... SET FOR LANDING

FINAL CHECK COMPLETED

AFTER LANDING CHECK

- 1 Transponder “Mode ALT” DISPLAY “**GND**”
- 2 Landing Light & Navigation Lights..... OFF
- 3 Flaps UP
- 4 Elevator Trim..... SET FOR TAKE OFF

AFTER LANDING CHECK COMPLETED

PARKING & ENGINE SHUT DOWN

- 1 Parking Brake SET AS REQUIRED
- 2 Throttle **1 000 rpm !**
- 3 COM..... MONITOR 121.50
- 4 Avionics & Transponder OFF
- 5 FLARM..... OFF
- 6 Electrical Consumers (**except beacon light**) OFF
- 7 Throttle at Idle CHECK DEAD CUT
- 8 Mixture IDLE CUT OFF
- 9 Ignition Switch..... **OFF & KEY REMOVED**
- 10 Master Switch OFF
- 11 Beacon Light..... OFF
- 12 Flight Data & Aircraft Log NOTED

PARKING & ENGINE SHUT DOWN CHECK COMPLETED

Important Data for Cessna C152 (according AFM)..... check T/O performance according AFM

V_R (Rotating speed)	50 kt
V_X (Best angle of climb speed).....	55 kt
V_Y (Best rate of climb speed).....	67 kt
V_A (Manoeuvring speed).....	104 kt
V_G (Best glide speed) (<i>clean</i>).....	60 kt
V_{NO} (Max. structural speed).....	111 kt
V_{NE} (Never exceed speed).....	149 kt
V_{FE} (Max. flaps extend speed)	85 kt
V_S (Stalling speed - clean).....	40 kt
V_{SO} (Stalling speed – full flap)	35 kt
V_{initial}	80 kt
V_{intermediate}	70 kt
V_{final}	60 kt
V_{cruise climb}	80 kt
Max. Crosswind	12 kt
Service Ceiling	14 700 ft

Weights

MTOW	1 670 lb (758 kg)
Empty weight	1 183 lb (537 kg)
Max. useful load ...	487 lb (221 kg)

Fuel (AVGAS 100LL)

Max. capacity	26.0 US Gal (98 l)
Usable fuel	24.5 US Gal (93 l)
Fuel flow	6 US Gal/h (23 l/h)

Oil (15W40)

Max. capacity	6 US Quarts
Min. quantity	4 US Quarts

Tyre pressure


Nose wheel	1.9 bar (28 psi)
Main wheel	2.1 bar (30 psi)

Power settings(Mixture leaned, Temp. ISA)

Pressure Alt.. 65 % bhp	75 % bhp	
2 000 ft	2 300 rpm	2 400 rpm
4 000 ft	2 350 rpm	2 450 rpm
6 000 ft	2 400 rpm	2 500 rpm
8 000 ft	2 400 rpm	2 550 rpm
10 000 ft	2 450 rpm	2 500 rpm (68%)
12 000 ft	2 450 rpm (62%)	

Circuit (Power, Speed, Configuration)

POWER 1900-2100 rpm
Flaps 10°
85 – 80 kt

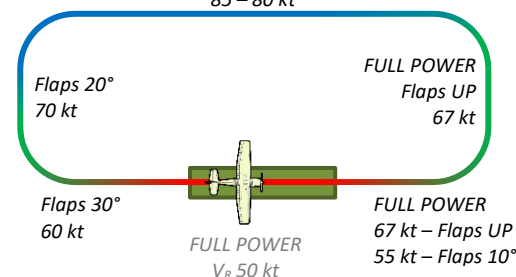

Engine:Avco Lycoming O-235-L2C (110 hp @ 2 550 rpm)

Electrical system: 28 V DC

Battery:..... 24 V DC